



LOCAL AREA NETWORKS (LAN)



SERVERS



DATA CENTRES



TELECOMMUNICATIONS DEVICES



E-BUSINESS (Servers Farms, ISP/ASP/POP)



INDUSTRIAL PROCESSES



INDUSTRIAL PLCS



ELECTRO-MEDICAL DEVICES



EMERGENCY DEVICES (Lights/Alarms)

Master HP

100-600 kVA Three-phase/Three-phase



Highlights

- Input stage with IGBT technology
- Galvanic Separation
- High overload capacity
- LCD Display



Master MPS range has been enhanced with the HP version in sizes from 100 to 600 kVA. Thanks to the on-line, double conversion technology achieved entirely with IGBT and DSP (Digital Signal Processor), the Master HP series ensures maximum protection and power quality for any type of data processing or industrial load, particularly for

“mission critical” applications, and classified as VFI SS 11.

(Voltage and Frequency Independent) in accordance with IEC EN 62040-3.

This series has been designed using a new configuration that includes an IGBT sinewave input rectifier rather than the more conventional thyristors.

Zero impact source

The HP version offers the benefits summarised in the Zero Impact Source formula, thanks to the IGBT rectifier, solves all integration problems in systems where the power supply has a limited installed power, where the UPS is also powered by a generator, or where there are compatibility problems with loads that generate harmonic currents,; as a matter of fact, Master HP has zero impact on the power source, either network or generator:

- less than 3% input current distortion
 - Input power factor 0.99
 - power walk-in function that ensures a progressive start-up of the rectifier
 - start-up delay function, to restart the rectifiers when mains power is restored if there are several UPSs in the system.
- In addition, MASTER HP plays a filter and power factor correction role in the power network upstream of the UPS, since it eliminates harmonic components and the reactive power, generated by the powered utilities.

Battery care system: maximum battery care

Master HP features the same Battery Care System as the Master series. The conventional MPS takes care of battery operating status, in order to maintain service conditions for as long as possible.

Flexibility

The configuration with the output transformer, a feature of both the Master HP and conventional series, is characterised by the galvanic isolation of the load and the battery for greater versatility in system configurations. As a matter of fact it allows for two network inputs (main and emergency) separate, and coming from two different power sources; this is particularly suited to parallel systems in order to ensure the selectivity between the two sources, thus improving the reliability of the entire installation.

Main features

- High output
- Compact size: only 0.85 m² a for 250kVA UPS
- Light weight
- Double load protection, both electronic and galvanic, for the battery.


The entire HP Master range is suited for use in the broadest spectrum of applications; thanks to the flexibility of

configuration, accessories and options available, it is suited for powering capacitive loads such as blade servers, etc. Power supply reliability and availability for critical applications are guaranteed by the parallel distributed or centralised parallel up to 8 units, per redundant (N +1) or power parallel and by all the different configurations available in the Master MPS range.

Options

- Input isolation transformer
- Synchronisation device (see UGS Master MPS)
- Hot connection device (see PSJ Master MPS)
- Interface for generator
- Closed Loop parallel kit option (Closed loop: to be ordered with the UPS)
- Empty battery cabinets or for runtimes

dimensions (mm)

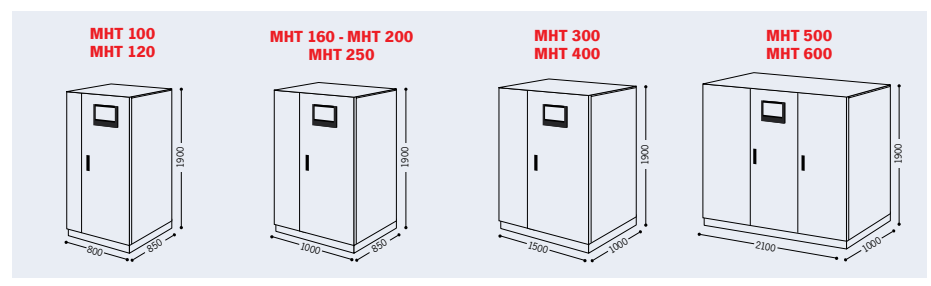

MODELS	MHT 100	MHT 120	MHT 160	MHT 200	MHT 250	MHT 300	MHT 400	MHT 500	MHT 600
POWER	100	120	160	200	250	300	400	500	600
INPUT									
Nominal voltage	380 - 400 - 415 Vac Three-phase								
Frequency	45 ÷ 65 Hz								
Power factor	> 0.99								
Harmonic current distortion	<3% THDi								
Soft start	0 ÷ 100% in 30" (selectable)								
Frequency tolerance	± 2% (selectable from ± 1% to ± 5% from front panel)								
Standard equipment provided standard	Back Feed protection; separable bypass line								
BATTERIES									
Type	open lead acid and VRLA AGM / GEL; NiCd.								
Ripple current	Zero								
Charge voltage compensation	-0.5 Vx°C								
OUTPUT									
Nominal power (kVA)	100	120	160	200	250	300	400	500	600
Active power (kW)	90	108	144	180	225	270	360	450	540
Number of phases	3 + N								
Nominal voltage	380 - 400 - 415 Vac Three-phase + N								
Static stability	± 1%								
Dynamic stability	± 5% in 10 ms								
Voltage distortion	< 1% with linear load / < 3% with non-linear load								
Crest factor (I _{peak} /I _{rms})	3:1								
Frequency stability on battery	0.05%								
Frequency	50 or 60 Hz (selectable)								
Overload	110% for 60'; 125% for 10'; 150% for 1'								
INFO FOR INSTALLATION									
Weight (kg)	656	700	800	910	1000	1400	1700	2100	2700
Dimensions (hwd) (mm)	1900 x 800 x 850		1900 x 1000 x 850			1900 x 1500 x 1000		1900 x 2100 x 1000	
Remote signals	voltage-free contacts (configurable)								
Remote controls	ESD and bypass (configurable)								
Communication	Double RS232 + remote contacts + 2 slots for communications interface								
Ambient temperature	0°C / +40°C								
Relative humidity	< 95% non-condensing								
Colour	Dark grey RAL 7016								
Noise level (1 m)	63 ÷ 68 dBA					70 ÷ 72 dBA		70 dBA	72 dBA
Protection level	IP20 (others upon request)								
Smart Active Output	up to 98,5%								
Regulations	Safety: EN 62040-1-1 (directive 2006/95/EC); EMC: EN 62040-2 (directive 2004/108/EC)								
Classification according to IEC 62040-3	(Voltage Frequency Independent) VFI - SS - 111								



ITALIA

LEGNAGO, Headquarters Production and Sales Management

Viale Europa, 7
37045 Legnago (VR)
Tel.: +39 0442 635811
Fax: +39 0442 629098
www.riello-ups.com
riello@riello-ups.com

MILANO, Production and Sales Office

Via Somalia, 20
20032 Cormano (MI)
Tel.: +39 02 663271
Fax: +39 02 66327351
www.riello-ups.com
riello@riello-ups.com

ROMA, Sales Office

Via Fosso della Magliana, 34/G
00148 Roma
Tel.: +39 06 65192125
Fax: +39 06 65192247
www.riello-ups.com
rielloroma@riello-ups.com

UK

RIELLO UPS Ltd
Unit 50 - Clywedog Road North
Wrexham Industrial Estate - Wrexham LL13 9XN
Tel.: +44 (0)1978 729 297 - Fax: +44 (0)1978 729 290
www.riello-ups.co.uk / riello@riello-ups.co.uk

CONSTANT POWER SERVICES Ltd

Unit 3 - Trust Industrial Estate, Wilbury Way
Hitchin, Herts, SG4 0UZ
Tel.: +44 (0)1462 422 955 - Fax: +44 (0)1462 422 754
www.cps4ups.co.uk / info@cps4ups.co.uk

FRANCE

RIELLO ONDULEURS s.a.r.l.
SIEGE SOCIAL:
2/4 Rue du Bois Chaland,
ZAC du Bois Chaland - 91090 Lisses
Tel.: +33 (0)1 60 875454 - Fax: +33 (0)1 60 875450
www.riello-onduleurs.com - ventes@riello-onduleurs.com

SALES SUD

147 Avenue M. Mérieux,
Parc de Sacuny, Park Avenir 1 - 69530 Brignais
Tel.: +33 (0)4 72 177108 - Fax: +33 (0)4 78 351422
www.riello-onduleurs.com - contact@riello-onduleurs.com

ESPAÑA

RIELLO ENERDATA s.l.
C/ Labradores, 13 Urb. Prado del Espino
28660 Boadilla del Monte, Madrid
Tel.: +34 (0)91 63 33 000 - Fax: +34 (0)91 63 21 793
www.riello-enerdata.es / enerdata@riello-enerdata.es

RIELLO ENERDATA s.l.

C/Aviación 18 Edificio Morena y Vallejo 1
1º planta pol. Ind. Calonge
41007 Sevilla ESPAÑA
Tel. +34 955 040044
Fax +34 955 040041
www.riello-enerdata.es / enerdata@riello-enerdata.es

RIELLO TDL s.l.

c/ Terra Alta, 88 - P.I. "Can Carner"
08211 Castellar Del Vallès, Barcelona
Tel.: +34 (0)93 74 71 210 - Fax: +34 (0)93 71 46 562
www.riello-tdl.com / comercial@riello-tdl.com

DEUTSCHLAND

RIELLO UPS GmbH
Siemensstr. 12
21465 Reinbek bei Hamburg
Tel.: +49 (0)40 727 57-06 - Fax: +49 (0)40 727 57-189
www.riello-ups.de / info@riello-ups.de

INDIA

RIELLO PCI INDIA PVT. LTD.
Prime Group Building,
11/5B, Pusa Road,
New Delhi - 110 005.
Phones: 91-11-41 888 999 (30 lines), 41 888 888,
2576 2562-64, 2576 2552-53, 2581 3338
Fax: 91-11-2575 5815, 2582 1623

PEOPLE'S REPUBLIC OF CHINA

Riello UPS (Asia) Co., Ltd
28F, No. 500, Fute Dong Er Road, Waigaoqiao Free Trade
Zone, Pudong District
200131 Shanghai
Tel: +86-21-50464748 - Fax: +86-21-50464648
www.riello-ups.com - info@riello-ups.cn

Riello UPS Asia Beijing Office
No.418, 4F, Block A, Gaode Platza, No.10,
Huayuan Dong Road, Haidian District
Beijing
Tel: +86-10-82038861 / 8862
Fax: +86-10-82038863

Riello UPS Asia Guangzhou Office
Address Unit 1507 East Building, Dongshan Square,
No. 65, Xianlie Zhong Road, Yuexiu District, 510095,
Guangzhou.
Tel: +86-20-28848001
Fax: +86-20-28848002

ASIA PACIFIC

SINGAPORE REPRESENTATIVE OFFICE
No. 138, Robinson Road - The corporate office #14-06
068906 SINGAPORE
Tel. +65 6323 4131 - FAX. +65 6323 4212
www.riello-ups.com - info@riello-ups.sg



www.riello-ups.com
riello@riello-ups.com